
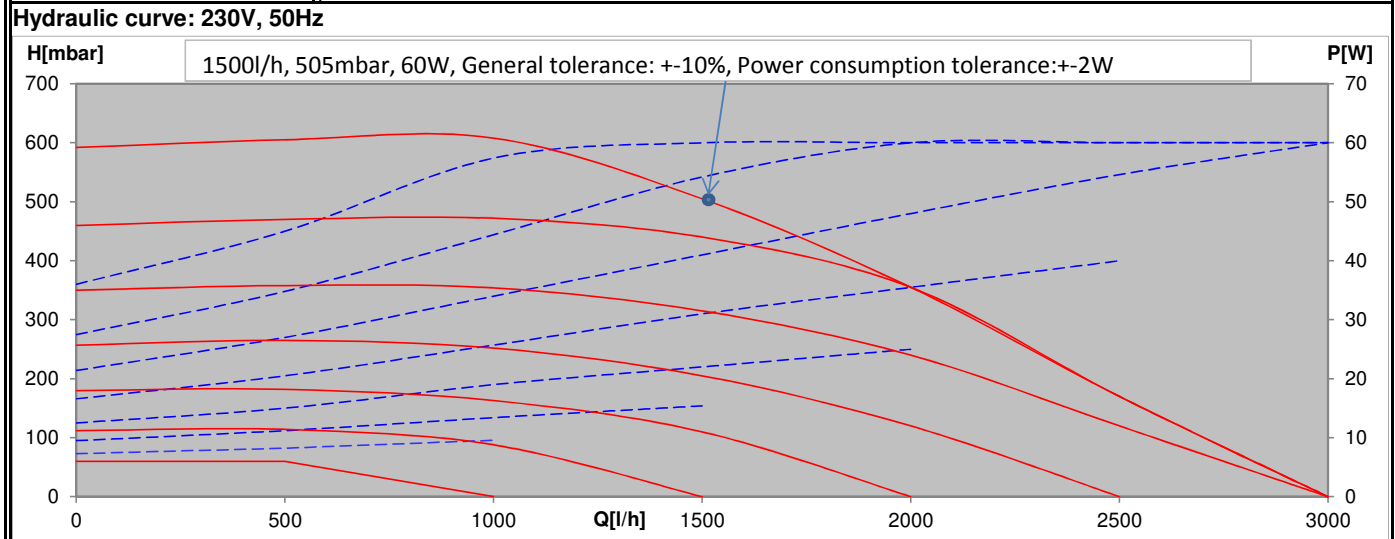


		Nr:	
Customer:		Page:	1of 1
Pump type:	E6-VARIO 60/530P	Date:	
Article number of pump:	6050C0010	Issued by:	Xylem Service Hungary
Sample serials:		Technical support:	
Control type:	Speed control by potentiometer	 <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>Xylem Service Hungary Kft H-2700 Csepel Közsé-Községi ut 41 Made in Hungary</p> <p>Circulation pump E6-VARIO 60/530P</p> <p>Art.-Nr.: 6050C0010</p> <p>230V 50/60Hz 60W TF60 Class 155 (F) IP44 PN 0,2MPa (2bar)</p> <p>Prod. Date: 20151215 S/N: 2015121500001</p> <p style="text-align: center;">  6050C0010  2015121500001 </p> <p>LOWARA E6-VARIO 60/530P</p> <p>230V 50/60Hz 60W TF60 Class 155 (F) IP44 PN 0,2MPa (2bar)</p> <p style="text-align: right;">Xylem Art.-Nr.:6050C0010 Xylem Service Hungary Kft H-2700 Csepel Közsé-Községi ut 41 Made in Hungary</p> </div>	
PWM type:	NA		
Speed range:	1000-3100, RPM		
Input voltage range:	230V, 50/60Hz		
Protection:	IP44		
Maximum system pressure [bar]	PN 0,2MPa (2bar)		
Operating temperature range (water)	10°C - 60°C		
Operating temperature range (room)	10°C - 50°C		
Storage temperature range	-20°C - 50°C		
Max hydraulic performance (Q×H=max)	21,04W, 1500l/h, 505mbar		
Max head of pump H	608 mbar		
Max input power: [W]	60 W		
Possible media:	pure water		

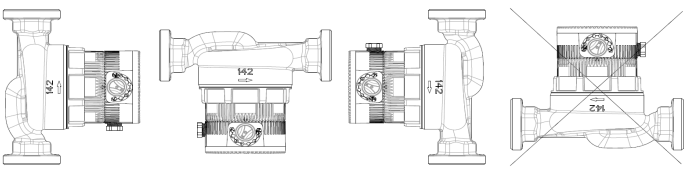

Allowed mounting positions:	All, except top side down	
Pump drawing nr:	NA	
Connection type:	3/4" hose connection	
Weight: [g]	1300g	
Dimensions: [mm]	126mm×106mm×152mm (L×W×H)	
Prepared by:		