

# Electric heaters



## Aqua compact 3-18kW

Electric heater made of thermoplastic for extra strength. Heating element made of Incoloy 825 or titanium for extra safety in installations where there is a high risk of corrosion, e.g. salt water pools.

Supplied with a thermostat for adjusting pool temperature as well as overheating cut out and flow switch. Minimum flow 90 l/min.

Max. pressure: 2.5 bar.


Suitable for private pools up to 100 m<sup>3</sup>

For pools with salt water or chlorinator we recommend a heating element of titanium.

### Technical data

Heating element Incoloy 825			Heating element titanium			Ampere 3-phase		
Item no.	Type	kg	Item no.	Type	kg	kW	230V 3~	400V 3~
141600	AC30	1.7	141600T	AC30T	1.7	3.0	8	5
141601	AC60	1.7	141601T	AC60T	1.7	6.0	15	9
141602	AC90	1.7	141602T	AC90T	1.7	9.0	23	14
141603	AC120	2.2	141603T	AC120T	2.1	12.0	31	18
141604	AC150	2.2	141604T	AC150T	2.1	15.0	38	22
141605	AC180	2.2	141605T	AC180T	2.1	18.0	46	27

Also available with connections 1 1/2" pipe or 1 1/2" threaded.

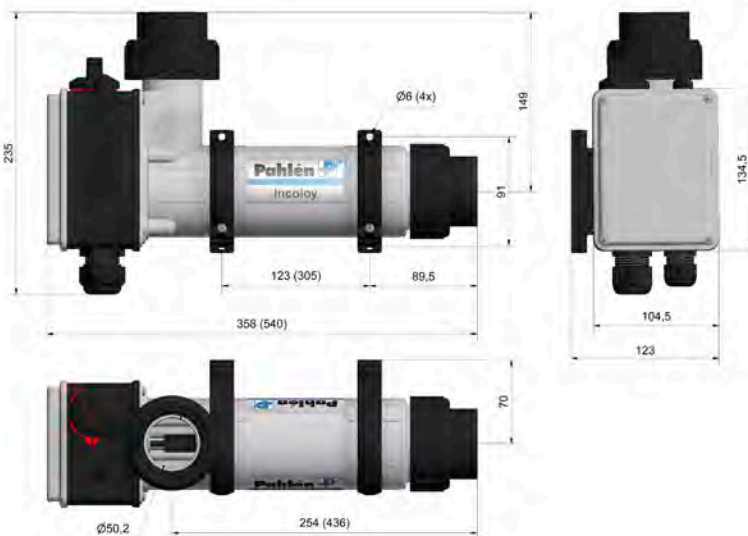

Dimensions for 12 - 18kW within brackets

### Features

- Electric heater made of fiberglass reinforced thermoplastic
- Housing of thermoplastic
- Horizontal installation, eliminates air pockets and damage to the electric heating element
- Heating elements of Incoloy 825 or titanium
- Equipped with overheating cutout and flow switch
- Slip connections for bonding of Ø 50 mm pipes

